

Connecting Wall Panel

WARNING

To prevent **SERIOUS INJURY** or **DEATH** from electrocution:

- Power **MUST NOT** be connected until instructed.

To prevent **SERIOUS INJURY** or **DEATH** from using the Wall Panel and a closing door:

- Install the Wall Panel within sight of the door at a minimum height of 5 feet (1.5m) above the floor. Make sure it is out of the reach of children and moving parts of door and hardware.
- **NEVER** permit children to access the Wall Panel or remote Transmitters.
- Operate the door **ONLY** when it is adjusted properly with no obstructions present and is in clear sight.
- **ALWAYS** keep a moving door in sight until it's completely closed.
- **NEVER** cross the path of a moving door.



NOTICE: Use Decko brand wall panel only. Use of other brands of wall panels or buttons may cause issues or damage to your opener.

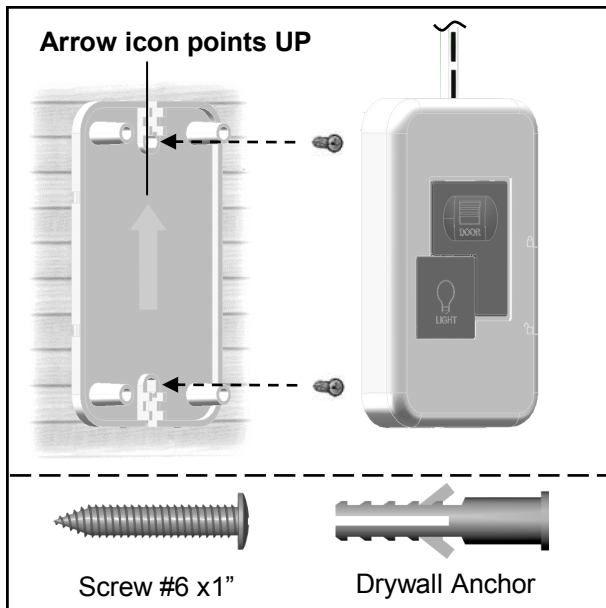


Fig. 1

The Wall Panel is a wired, illuminated door control placed inside your garage.

To install the Wall Panel:

1. Inside your garage, install the rear cover of the Wall Panel within sight of the door at a minimum height of 5 feet (1.5m) off the ground. Ensure it is installed out of the reach of children and free from the moving parts of the door and hardware.
2. With the "Arrow" icon on the rear cover pointing to up, securely fasten it to a solid surface with 1" screws. If attaching to drywall or other hollow surface, drill 3/16" holes and use the provided Drywall Anchors.
3. Snap the Wall Panel onto the rear cover.

To Connect the Wall Panel to the Opener

Connect the pair of wires from the Wall Panel to the "Wall Panel" terminals on the rear of the Opener, as shown in Fig.2.



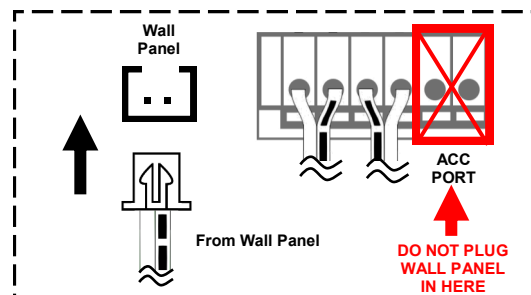


Fig. 2

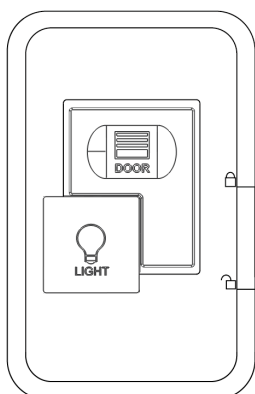

Using the Wall Panel

(ONLY after installation is completed)

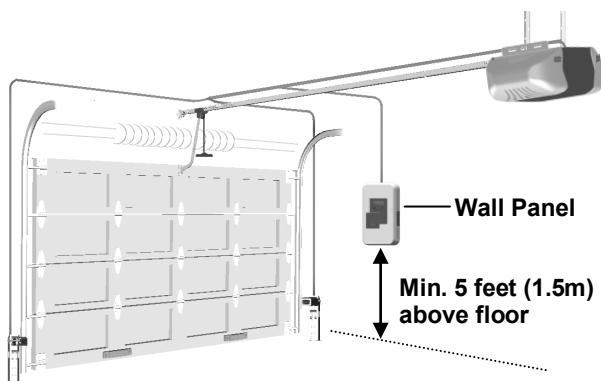

Door—Momentary press to access the door



Light— Turns the courtesy light On/Off



Vacation Lock

ON — Prevent access of door by Remote Transmitters and Door button



OFF — Door can be accessed by either access controls